


1. Punch 6 small holes through the black dots on the headstock.
2. Thread a string through each hole, glue it to the back of the headstock, then glue the other end to the bridge area (slightly darker rectangle)
3. Put the bridge over the strings, then cut off excess strings
4. Glue the brown side face to the front, then put on the back
5. Glue on the triangular back of the neck



Back of the neck

These two flaps attach to the side of the guitar, where the neck meets the body

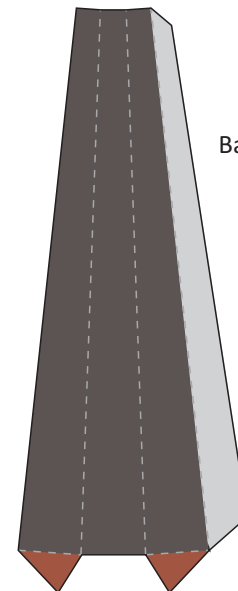

The bridge - goes over the strings

